



MIRION
TECHNOLOGIES



DOSE CALIBRATORS

CRC®-55tR

Dose Calibrator

*For Speed and Accuracy in
Measuring Doses*

FEATURES

- 8 in. color VGA touch screen display
- Single or optional second plug-and-play chamber capability
- Chamber can be placed 100 feet from the readout unit
- Bilingual (English/Spanish) Software
- On screen display of Nuclide Name, Number, Activity, Unit of Measure and Calibration Number
- Large character, high visibility display
- Over 80 nuclides with half-lives in memory
- Full alpha numeric touchpad
- Built-in dose calibration, quality control and self diagnostics
- Automated QC including constancy and linearity programs
- Compatible with Nuclear Medicine Management Systems via USB
- Optional printer for full size NRC records and patient labels for syringes and vials
- USB/PC communications
- Software upgrade via USB or flash drive
- USB printer capability
- Automated Geometry and Linearity Testing
- Capable of dual chambers
- Supports exchange of chambers with the CRC®-55tPET Dose Calibrator
- Chamber energy range: 15 keV to 3 MeV

DESCRIPTION

The new Capintec™ CRCR-55tR Dose Calibrator provides the speed and accuracy you need to measure and prepare doses with the reliability and performance you expect. The CRC-55tR calibrator's design includes a menu driven, color touch screen interface that is easy to learn and use.

The ion chamber is a proven time-tested, high pressure chamber Capintec design capable of measuring a dose as high as 6 Ci (250 GBq) with high accuracy.

Additional features such as USB/PC communications, printer capabilities, USB flash drive software upgrades and plug-and-play chamber make the CRC-55tR calibrator integral in improving your department's efficiency.

The innovative functional design of the CRC-55tR unit allows for a large, easy-to-read display that indicates Nuclide Name, Number, Activity, Unit of Measure and Calibration Number.


Entering data through the custom touch screen interface is fast and includes 28 programmable keys. The user can choose from 80 nuclides by simply selecting the nuclide symbol on the touch screen interface.

Other capabilities include storage of reference sources in memory that automatically decay correct for today's time and date. Automated quality control tests and self-diagnostics are built-in with automatic zero and background subtraction making the CRC-55tR calibrator exceptionally easy to use. An optional printer enables the CRC-55tR unit to print full size records and patient tickets with peel off labels for vial and syringe identification.

Count on us for excellence in energy measurement, and for our unsurpassed customer service, training and support!

CRC-55tR | DOSE CALIBRATOR

OPTIONAL COMPONENTS

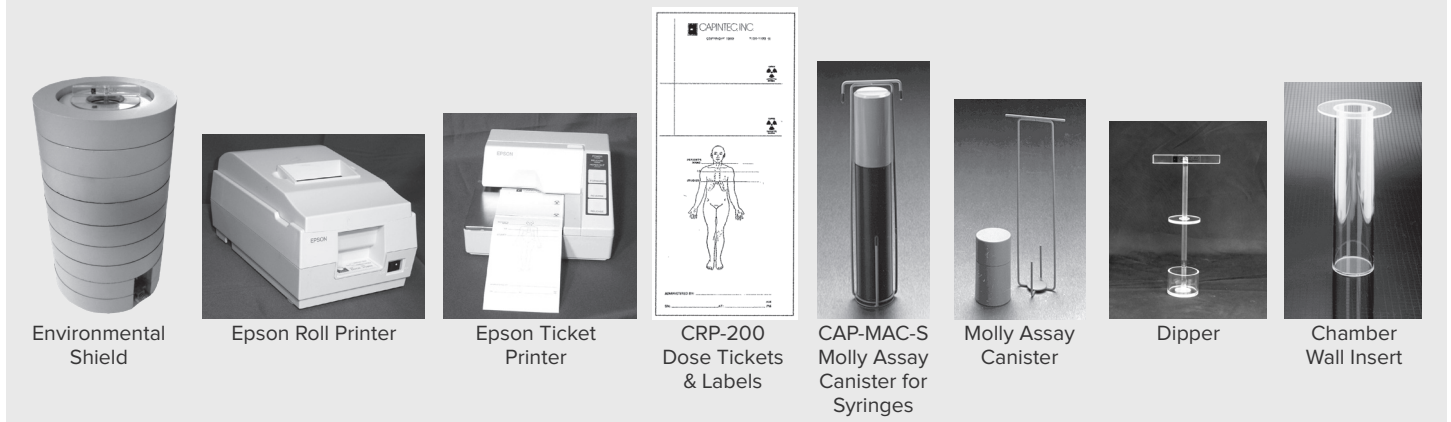

SPECIFICATIONS

Physical:

Console Dimensions

- Height: 42 cm (9.5 in.)
- Width: 23 cm (9.0 in.)
- Depth: 27 cm (10.5 in.)
- Weight: 3.4 kg (7.5 lb)

Chamber Dimensions

- Height: 43.8 cm (17.25 in.)
- Diameter: 17.2 cm (6.76 in.)
- Weight: 13.6 kg (30 lb)
- Well Diameter: 6.1 cm (2.4 in.)
- Well Depth: 25.3 cm (10.0 in.)
- Cable Length¹: 3.7 m (12 ft)

Cables

- Power: 1.8 m (6 ft)
- Printer: 1.8 m (6 ft)

Ionization Chamber

- Type: Thin wall, deep well, high pressure
- Fill Gas: 12 atm Ultra-Pure Argon

Measurement Range

- Type: Auto Ranging
- Activity: 250 GBq (6 Ci), max.
- Resolution: .001 MBq (.01 μ Ci), max.

Display Screen

- Type: 8 in. VGA LCD color touch screen display
- Format: Direct reading in Bq or Ci
- Bq/Ci Reading: User selectable or fixed
- Values Displayed: Nuclide name (Atomic symbol, Mass number), calibration number

Electrometer

- Accuracy: Better than $\pm 2\%$
- Linearity: Within $\pm 2\%$
- Response Time: Within 2 sec, 4 to 16 sec for very low activity samples

1: Longer cables are available. Consult factory.

Repeatability of Measurement

- Within $\pm 1\%$ within 24 hours during which time the calibrator is continuously in operation

Tests

- Diagnostics: Full test of program, system memories
- Daily: Auto Zero, Auto Background Adjust, Data Check, Accuracy and Constancy, Voltage Test
- Enhanced: Linearity, Geometry, Strip QC

Nuclear Data

- Nuclide Keys: 28 programmable keys
- System Memory: Over 80 nuclides (cal number and half-life)

Standard Source Data

- System Memory: Co-57, Co-60, Ba-133, Cs-137 standard sources

Molybdenum-99 Assay

- Methods: CapMac and canisters
- Measured Values: Mo-99 elution, Tc-99m, Tc-99m/Mo-99 Ratio

PC Port

- Interface: RS-232 and USB
- Compatibility: Standard Nuclear Medicine Management Systems

Printer (Optional)

- Interface: RS-232 and USB
- Type: Epson Roll, Epson Slip or Okidata full size dot matrix
- Printing Options: Full size test reports. Measured results on tickets

Power Requirements

- 100-240 V ac (50/60 Hz) 90 MA

ORDERING INFORMATION

- CRC-55tR Dose Calibrator: Item #5130-3234
- Environmental Shield: Item #7300-2450
- Epson Roll Printer: Item #5430-0058
- Epson Ticket Printer: Item #5430-0100
- CRP-200 Dose Tickets & Labels: Item #7120-1199
- CAP-MAC-S[®] Molly Assay Canister for Syringes: Item #5130-2046
- Molly Assay Canister: Item #5130-0006
- Dipper: Item #7300-2005
- Chamber Well Insert: Item #7300-2004



Mirion Technologies (Capintec), Inc. • 7 Vreeland Road, Florham Park, NJ 07932 USA

OPS-1432 – 01/2020

Copyright © 2020 Mirion Technologies, Inc. or its affiliates. All rights reserved. Mirion, the Mirion logo, and other trade names of Mirion products listed herein are registered trademarks or trademarks of Mirion Technologies, Inc. or its affiliates in the United States and other countries. Third party trademarks mentioned are the property of their respective owners.



CAPINTEC, INC.
Part of Mirion Technologies

www.capintec.com
www.mirion.com